



CROWN ELECTRONICS



2005A Industrial Blvd. Rockwall, TX 75087 972-771-4711 972-771-9499 (fax) 800-225-3429 (toll free)
sales@crownelectronics.com www.crownelectronics.com

RG-223/U DATA SHEET


CONSTRUCTION PARAMETERS:

		<u>WALL (in.)</u>	<u>OD (in.)</u>
CONDUCTORS:	19 AWG (1/.035) SILVER PLATED COPPER		0.035
DIELECTRIC:	SOLID POLYETHYLENE COLOR NATURAL	0.041	0.116
1 ST SHIELDING:	95% SILVER PLATED COPPER BRAID		0.138
2 ND SHIELDING:	95% SILVER PLATED COPPER BRAID		0.160
JACKET:	TYPE II PVC (NON-CONTAMINATING VINYL)	0.026	0.212

ELECTRICAL PROPERTIES:

CONDUCTOR RESISTANCE:	8 ohms/kft
IMPEDANCE:	50 ohm
CAPACITANCE:	30.8 pF/ft
VELOCITY OF PROPAGATION:	66%

CABLE CROSS-SECTION

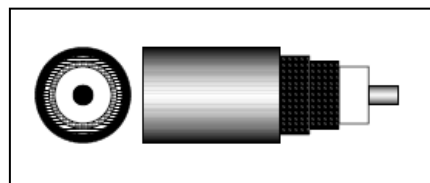

ATTENUATION:

(Max. db/100 ft):	50 MHz	2.8
	100 MHz	4.1
	200 MHz	6
	500 MHz	9
	900 MHz	13.6
	1000 MHz	14.3

MISCELLANEOUS INFORMATION:

UL RATING:	CL2X and RECOGNIZED COMPONENT AWM STYLE 2354
JACKET COLOR:	BLACK
JACKET PRINT (WHITE):	RG 223 TYPE CL2X 19 AWG (UL) E100316 OR AWM 1354
FLAME RATING:	UL-1581 VW-1 VERTICAL FLAME TEST
MAX. TEMPERATURE RATING:	75° C
MAX. OPERATING VOLTS:	30 V RMS MAX.
APPROX. WEIGHT (lb/1000ft):	37

*****THIS PRODUCT COMPLIES WITH EUROPEAN DIRECTIVE 2002/95/EC (RoHS)*****